
# Window Intercoms Models (SD-2006DL+/SD-2006CL+/SD-2006HL+)










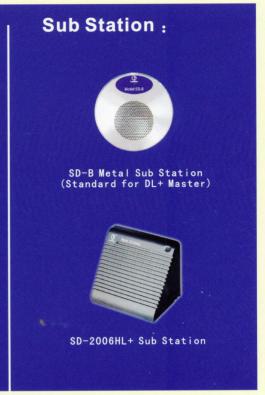


#### Features

- Fully Automatic VOX Hands-Free Operations
- Plug & Play; No special installation required
- Only one wire between Master and Sub Stations
- Vandal-Resistant Stainless Steel Sub (SD-2006DL+ model)
- Indivadual volume controls for both Master and Sub Stations
- Sub Station Built-in Microphone
- Optional Clip-on Microphone included
- Kit includes everything needed for operations
- Output for monitoring with LBW Master; Output for voice recording

### Dimensions (mm)



## Wiring Diagram

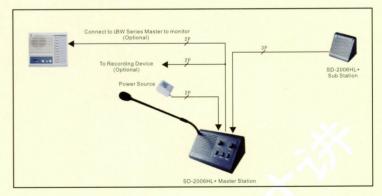

#### Specifications

- Operating Voltage: DC6V
- Operating Current: no more than 300mA
- Output: 1W+1W 100HZ~15KHZ
- Internal/External Microphone: -51db±2db 20HZ~16KHZ
- Gooseneck Length: 360mm

